

Firma: Player Plus doo Adresa: Svetogorska 9 Telefon: +381 11 3347 442 Fax: +381 11 3347 615

PIB: 106966344

E-mail: porudzbine@player.rs

Pioneer DM-50D-W

Šifra: 16007

Kategorija prozivoda: Aktivni Studijski Monitori

Proizvođač: Pioneer DJ

Cena: 29.880,00 rsd



The ohms. The 5"

class-D amplifier


fiberglass woofers deriver a macurar, punchy bass, and the

3/4" soft-dome tweeters deliver well-balanced high frequencies. A stereo mini-jack headphone output with a speaker-volume knob are built into the front panel of the speaker.

The rear panel features dual 1/4", stereo RCA, and 3.5mm stereo mini-jack inputs, along with an output to the right satellite speaker. In addition, a power cord, a 6.6' speaker cable (for the satellite speaker), a 3.5mm to RCA adapter cable, and bottom cushions are also included.

Advanced Design for High-Performance Sound

Each DM-50D speaker produces pure, balanced bass sound, thanks to a new Class-D amplifier with 96 kHz sampling DSP. In addition, the DM-50D model features an updated DECO convex diffuser to help deliver

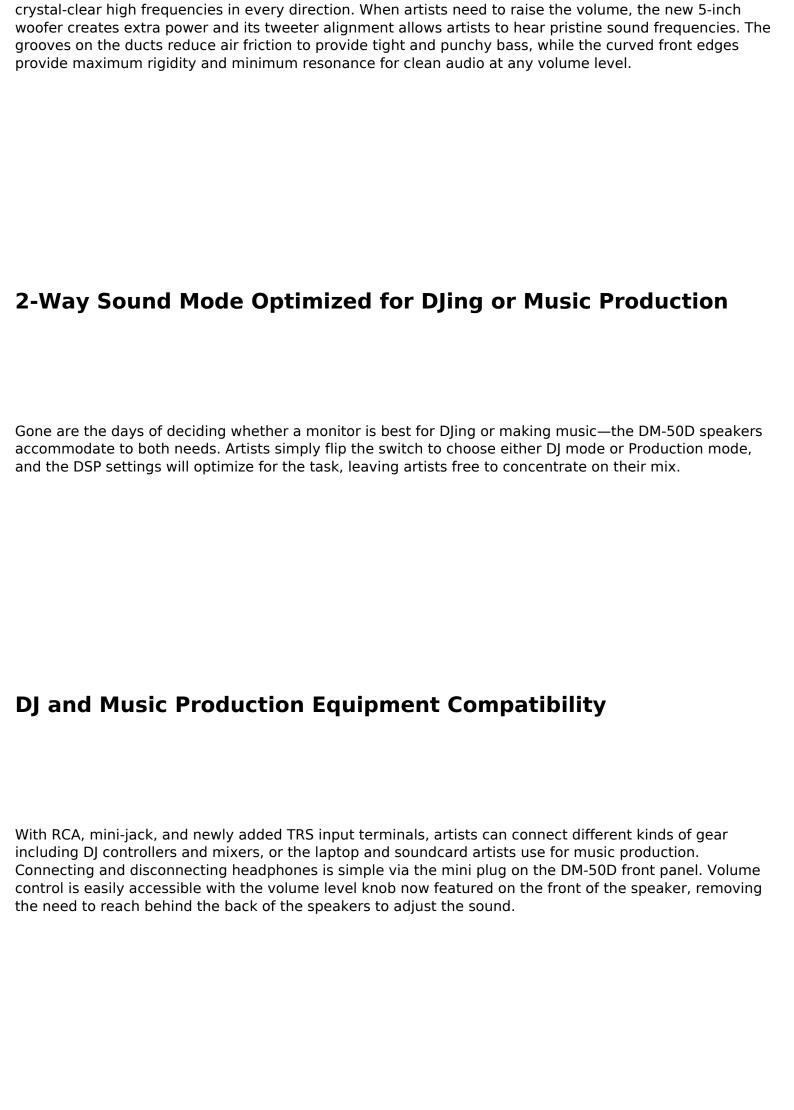

Sleek Design Catering to Any Style

Artists can bring a slick, professional look to their setup by choosing from two different colors. The finish of the black DM-50D can seamlessly blend with classic DJ equipment while the white DM-50D-W can better complement the interior design of the artist's creative environment.

Pioneer DJ DM-50D Specs

Studio Monitor

Monitor Type	Active 2-Way
Enclosure	Bass-Reflex, Shielded
Power Rating	25 W RMS per Channel
Impedance	4 Ohms
Drivers	LF Driver: 1 x 5" / 127 mm Fiberglass Woofer HF Driver: 1 x 0.75" / 19.05 mm Dome Tweeter
Amplification	2 x Full-Range Amplifier: Class-D

EQ			None	
Filters			None	
Parametric EQ			None	
Connectivity				
	2 x 1/4" TRS Balanced Female	Analog Input (10 Kilohms	5)	
Audio I/O	1 x Stereo RCA Unbalanced Fe 1 x 1/8" / 3.5 mm TRS Unbalar	emale Analog Input		
'	1			
Digital Audio				
Max Sample Ra	ate/Resolution	9	6 kHz / 24-Bit	
		11		
Power				
101 :-		110 . 040		
AC Input Power	•	110 to 240 VAC, 50/60 H	IZ	

Power Consumption	25 W 0.3 W (Standby)	

General

Enclosure Material	MDF
Mounting Points	None
Dimensions (W x H x D)	6.9 x 10.1 x 10.3" / 175.3 x 256.5 x 261.6 mm 6.9 x 9.7 x 10.3" / 175.3 x 246.4 x 261.6 mm
Weight	8.6 lb / 3.9 kg 7.7 lb / 3.5 kg

Packaging Info

Package Weight	20.72 lb
Box Dimensions (LxWxH)	18.1 x 15.5 x 12.7"

