


## MARTIN RUSH MH 3 Beam B-Stock

### MARTIN RUSH MH 3 Beam B-Stock

Šifra: 8935  
Kategorija proizvoda: Roto Glave  
Proizvođač: Martin

Cena: **251.880,00** rsd

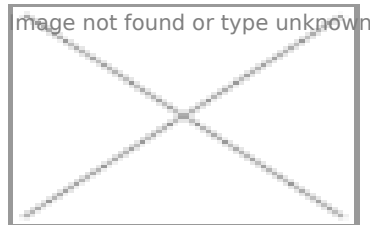

The RUSH MH 3 Beam is a powerful beam moving head that blasts an intense and narrow long-throw beam for spectacular mid-air looks and effects. It houses a fixed gobo wheel and color wheel with a multitude of effects possible from a dimmer and strobe, frost, zoom, 8-facet prism and focus.

Powerful beam moving head

Sharp, narrow long-throw beam

Mid-air

Fixed gobo wheel

Color

Mechanical dimming and strobe

Frost

8-facet prism

Motor

Battery-powered display

3 & 5

Length: 418 mm (16.5 in.)

Width: 321 mm (12.6 in.)

Height: 489 mm (19.3 in.)

Weight: 20.5 kg (45.2 lbs.)

Approved lamp: Philips MSD Platinum 5R

Color temperature: 8000 K

CRI (Color rendering index): 75

Average lifetime: 2000 hours

Color wheel: 14 colors plus open, rotation with variable direction and speed

Static gobo wheel: 17 gobos plus open, wheel rotation and shake

Pre-programmed effects: 31 pan and tilt macros, adjustable speed

Shutter: Strobe effect, pulse effects, instant open and blackout

Prism: 8-facet, indexing and rotation with variable direction and speed

Frost: Fade in/out

Zoom: Motorized

Focus: Motorized

Dimmer: 0 - 100%, four dimming curve options

Pan: 540°

Tilt: 270°

Pan and tilt speed: Adjustable via onboard control panel and DMX

Control: DMX  
DMX channels: 19  
Setting and addressing: Control panel with LCD display  
DMX compliance: USITT DMX512/1990

Beam angle: 1° - 3.8°

Color: Black  
Housing: High-impact flame-retardant thermoplastic  
Protection rating: IP20

Mounting points: Two quarter-turn brackets for rigging clamps  
Location: Indoor use only, must be fastened to surface or structure  
Orientation: Any

AC power input: Neutrik PowerCon  
DMX data in/out: 3-pin and 5-pin locking XLR

AC power: 100-240 V nominal, 50/60 Hz  
Typical total power consumption: 390 W  
*Power consumption figures are typical, not maximum. Allow for +/-10% variation.*

Cooling: Forced air (temperature-regulated, low noise)  
Maximum ambient temperature (Ta max.): 40° C (104° F)  
Minimum ambient temperature (Ta min.): 0° C (32° F)

Power cable, 1.5 m (4.9 ft.), without mains plug  
Mounting brackets

RUSH MH 3 Beam™ in cardboard box

© 2013 Martin Professional A/S. *Specifications subject to change without notice*