

logo not found or type unknown

Firma: Player Plus doo
Adresa: Svetogorska 9
Telefon: +381 11 3347 442
Fax: +381 11 3347 615
PIB: 106966344
E-mail: porudzbine@player.rs

PR LIGHTING XR 200 BEAM - Roto glava

PR LIGHTING XR 200 BEAM - Roto glava

Šifra: 8989

Kategorija proizvoda: Roto Glave

Proizvođač: PR LIGHTING

Cena: **179.880,00** rsd

XR 200 BEAM

PR-2203

XR 200 BEAM equipped with Platinum 5R lamp, moving beam light with an unprecedented brightness usually achievable only with far greater wattages. Weighing just 16 kg, produces a perfectly parallel, laser-like beam with an incredible output of 67,765 lx at 20m. With its light weight and modest footprint, XR 200 BEAM is small enough to be fitted anywhere - on trusses at live and TV events, on stage, in showrooms or conference rooms.

Key Features:

PHILIPS MSD Platinum 5R (8,000K) (189W)

1 color wheel with 14 dichroic color filters

Beam Angle 0°~4° linearly adjustable

Double shutter blades, 0.3~20 F.P.S

Channels: Short Mode: 10, Standard Mode: 14

Weight: 16Kg

Fixture usage time and software version display

1 fixe

white

1 Pris

face

5

adju

IP20

Modu


Standard Accessories:

G clamps, 2 pcs; XLR connectors, 1 set

Safety cord, 2 pc;

Optional Accessories: Ω clamps, 2 pcs

Image not found or type unknown

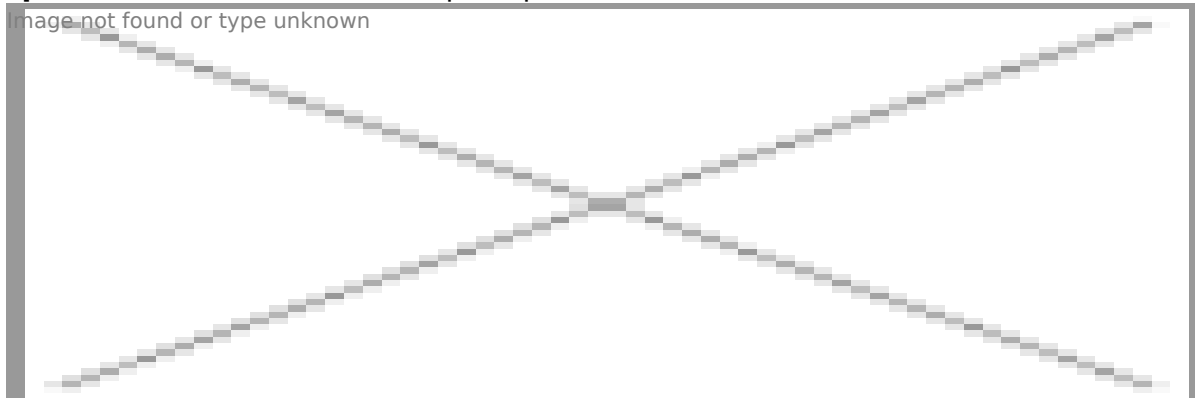

Technical Data:

Power Supply: 100V/200V/220V/230V/240V AC 50/60Hz

Power Consumption: 280W@220V

Light Source:

PHILIPS MSD Platinum 5R
(8,000K, 2,000hrs)

Colors:**1 Color Wheel**

14 dichroic colour filters plus white
variable speed and bi-directional rainbow effect
linear colour changing is available

Gobos:**1 Fixed gobo wheel :**

17 interchangeable gobos+ white
Shaking and bi-directional wheel scrolling at variable speeds
Gobo changing is available

Prism/Frost Wheel

8-facet rotating Prism(bi-directional with variable speeds)+CTO filter+ Frost Filter + White

Focusing

0-100% linearly adjustable by Dmx

Strobe:

Double shutter blades, 0.3~20 F.P.S

Head Movement:

Pan 540°, Tilt 270° with auto position correction

Beam Angle

0°~4°, Linear zoom

Control:

DMX512, 3 pin and 5 pin interfaces
10 channels in short mode, 14channels in standard mode
Self-test mode

Other Functions:

Adjustable Pan & Tilt speed
Fixture and lamp usage time display
Modular construction for easy maintenance
DMX512 wireless receiver (optional)
DMX512 wireless transmitter (optional)

Housing:

Composite plastic, IP20

Weight: 16Kg

Sizes: please see the drawings below

Light Output:

