

## PR LIGHTING XR 200 BEAM - Roto glava

PR LIGHTING XR 200 BEAM - Roto glava

Šifra: 8989  
Kategorija proizvoda: Roto Glave  
Proizvođač: PR LIGHTING

Cena: **179.880,00** rsd

### XR 200 BEAM PR-2203

XR 200 BEAM equipped with Platinum 5R lamp, moving beam light with an unprecedented brightness usually achievable only with far greater wattages. Weighing just 16 kg, produces a perfectly parallel, laser-like beam with an incredible output of 67,765 lx at 20m. With its light weight and modest footprint, XR 200 BEAM is small enough to be fitted anywhere - on trusses at live and TV events, on stage, in showrooms or conference rooms.

#### Key Features:

PHILIPS MSD Platinum 5R (8,000K) (189W)

1 color wheel with 14 dichroic color filters

Beam Angle 0°~4° linearly adjustable

Double shutter blades, 0.3~20 F.P.S

Channels: Short Mode: 10, Standard Mode: 14

Weight: 16Kg

Fixture usage time and software version display

1 fixe

white

1 Pris

face 5

pan 5

adju

IP20

Modu


#### Standard Accessories:

G clamps, 2 pcs; XLR connectors, 1 set

Safety cord, 2 pc;

#### Optional Accessories: Ω clamps, 2 pcs

Image not found or type unknown

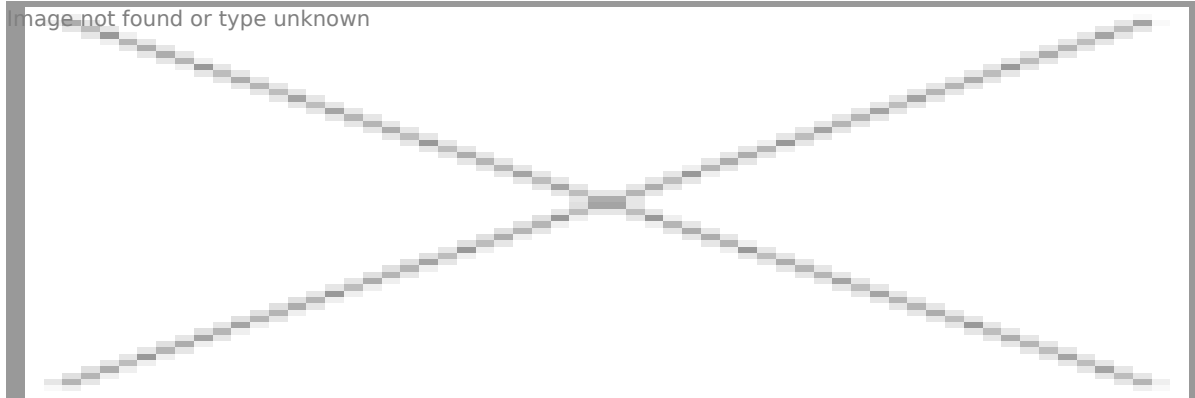

#### Technical Data:

**Power Supply:** 100V/200V/220V/230V/240V AC 50/60Hz

**Power Consumption:** 280W@220V

**Light Source:**

PHILIPS MSD Platinum 5R  
(8,000K, 2,000hrs)

**Colors:****1 Color Wheel**

14 dichroic colour filters plus white  
variable speed and bi-directional rainbow effect  
linear colour changing is available

**Gobos:****1 Fixed gobo wheel :**

17 interchangeable gobos+ white  
Shaking and bi-directional wheel scrolling at variable speeds  
Gobo changing is available

**Prism/Frost Wheel**

8-facet rotating Prism(bi-directional with variable speeds)+CTO filter+ Frost Filter + White

**Focusing**

0-100% linearly adjustable by Dmx

**Strobe:**

Double shutter blades, 0.3~20 F.P.S

**Head Movement:**

Pan 540°, Tilt 270° with auto position correction

**Beam Angle**

0°~4°, Linear zoom

**Control:**

DMX512, 3 pin and 5 pin interfaces  
10 channels in short mode, 14channels in standard mode  
Self-test mode

**Other Functions:**

Adjustable Pan & Tilt speed  
Fixture and lamp usage time display  
Modular construction for easy maintenance  
DMX512 wireless receiver (optional)  
DMX512 wireless transmitter (optional)

**Housing:**

Composite plastic, IP20

**Weight:** 16Kg

**Sizes:** please see the drawings below

**Light Output:**

