

## FBT Mitus 206LA - Aktivni zvučnik

Šifra: 10312  
 Kategorija proizvoda: Aktivne Zvučne Kutije  
 Proizvođač: FBT

Cena: **179.880,00** rsd

### 600W + 300W - 134dB SPL Active precision coverage vertical array

**MITUS 206 LA** is a 2-way compact line array system boasting an extended performance in the mid and high frequencies thanks to the original technology applied, matched with the latest Class D pulse width modulation built-in bi-amp system with DSP, granting 600 Watts rms to the LF and 300 Watts rms to the HF. Ideal for small to medium sized applications, from multiple cabinet line arrays to single pole-mounted loudspeakers the MITUS 206 LA is equipped with 2x6.5" B&C neodymium woofers and 1.4" exit B&C neodymium compression driver mounted on a 100°H waveguide

Showcased at the 2010 Winter NAMM show, the [FBT Mitus 206 LA](#) is a two-way, compact, self-powered line array system with extended performance in the mid and high frequencies.

Intended for small to medium sized applications, and with multiple cabinet line arrays to single pole-mounted loudspeakers, the Mitus 206 LA is equipped with 2 x 6.5-inch B&C neodymium woofers and a 1.4-inch-exit B&C neodymium compression driver mounted on a 100-degree (H) waveguide.

It also incorporates a class D amplifier design, with digital signal processing, that delivers 600 watts (RMS) to the LF and 300 watts (RMS) to the HF. A strong but light-weight switch mode power supply provides high reliability.

The Mitus 206 LA enclosure is constructed from high-impact polypropylene and incorporates integrated line array rigging hardware. The maximum vertical dispersion of each module is 10 degrees, depending on the number of elements combined in the array.

A rigid metal grille backed by a foam protects the transducers from wear.

It can be configured using the new flyable Mitus 212 FSA (2 x 12-inch) active subwoofer or ground stacked on the Mitus 121 SA (1 x 21-inch) and 118 SA (1 x 18-inch) powered subwoofers.

2 x 6.5" (165 mm) B&C neodymium woofers with 1.7" (44 mm) coil

1.4" (36 mm) exit B&C neodymium driver with 2.5" (64 mm) coil

Latest class D built-in amplifiers, 600Wrms to the LF and 300Wrms to the HF with switch mode power supply  
 Control panel with XLR input and link, volume, presets, HF level, HP-filter, ground-lift

High impact polypropylene gas-injected enclosure with integrated rigging hardware adjustable with 0° to 10° angle between cabinets at 2° step

Wide range of hardware accessories for flying and ground stacked configurations

Frequ

DSP c  
 for ac

100°  
 near 1


Ideal  
 pole m

to m

206-  
 the sy

Download PDF drawing  
Download Configurations

Image not found or type unknown

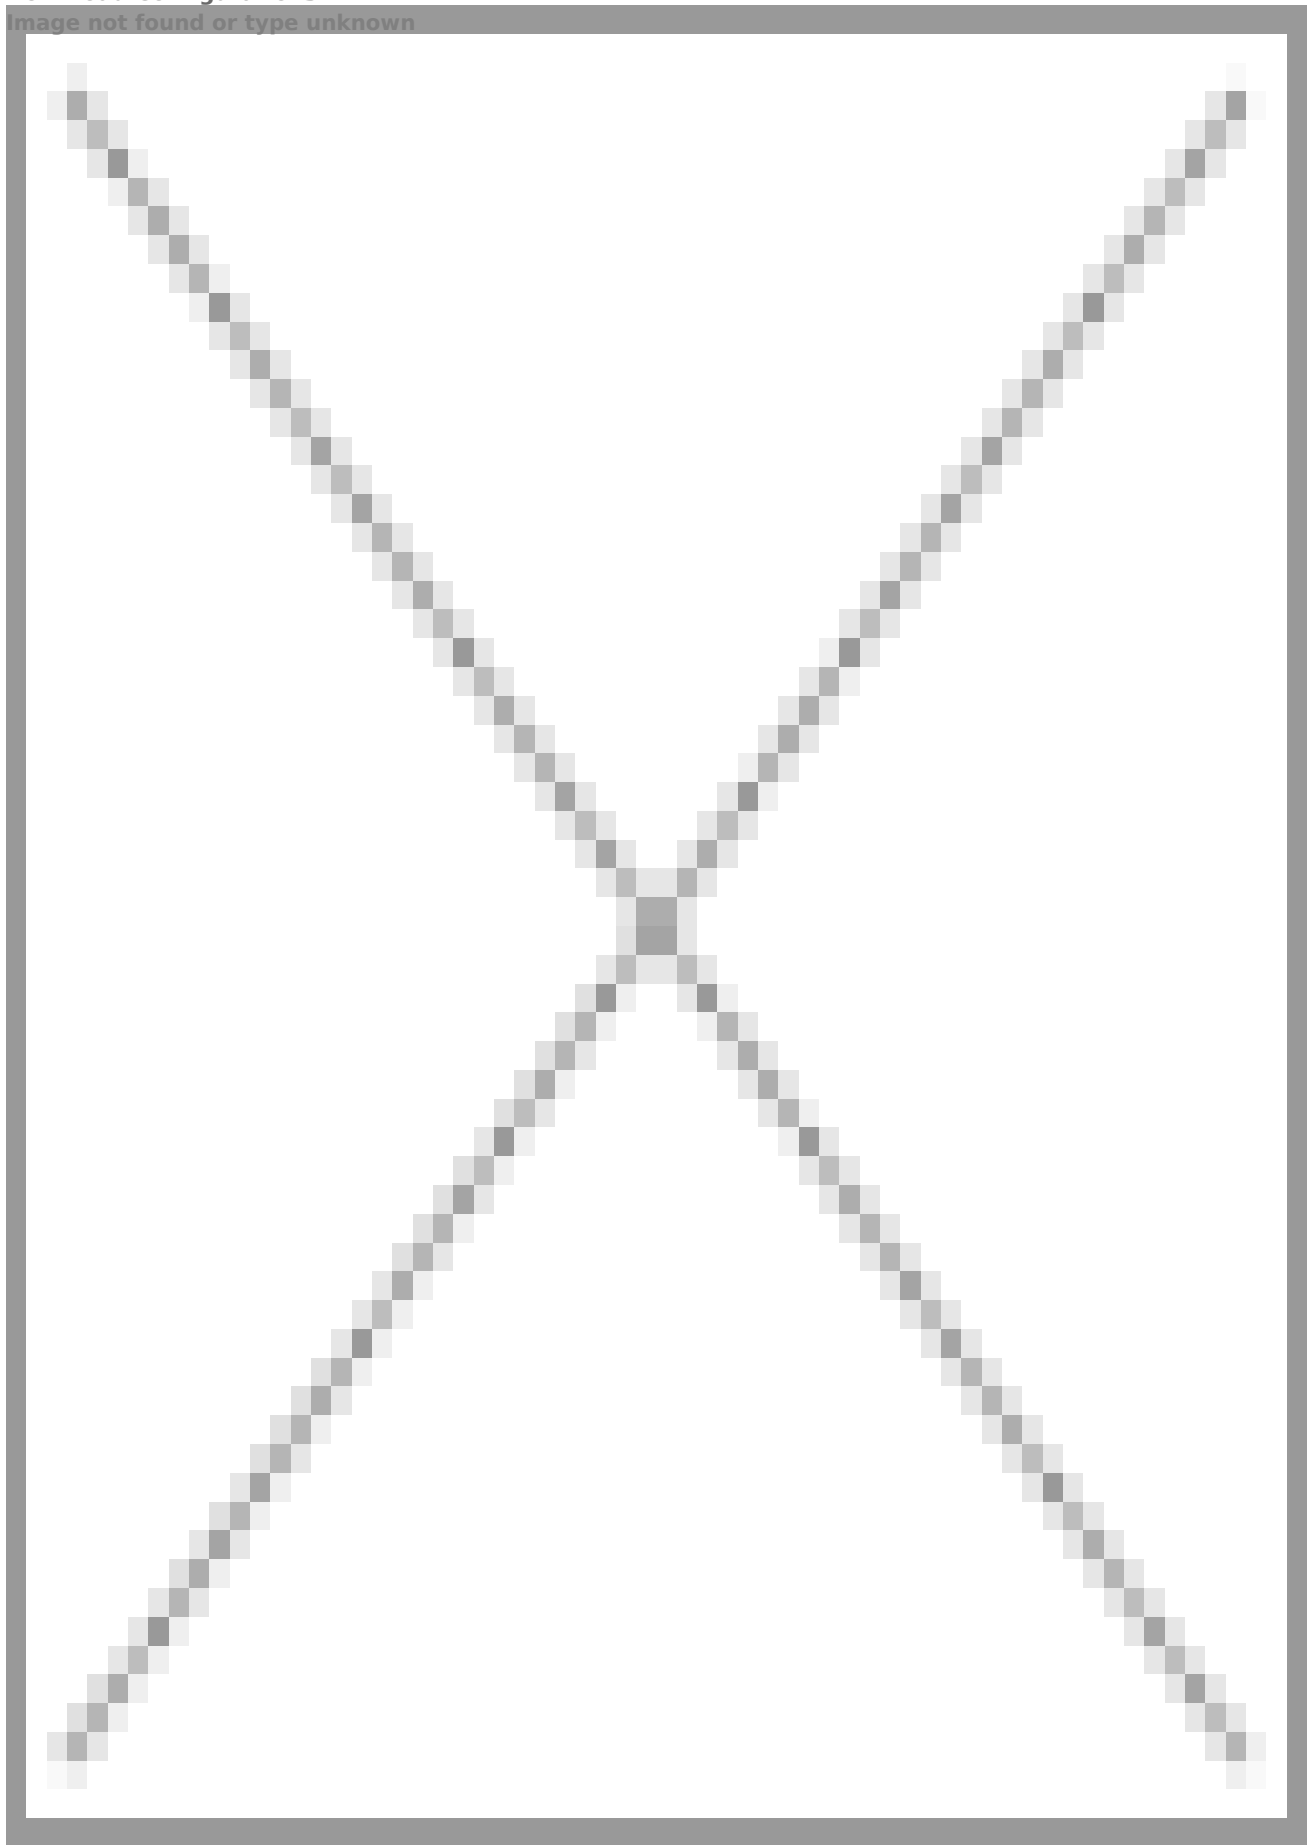

Cene su informativnog karaktera. Prodavac ne odgovara za tačnost cena iskazanih na sajtu, zadržava pravo izmena cena. Ponudu za ostale artikle, informacije o stanju lagera i aktuelnim cenama možete dobiti na upit. Plaćanje se isključivo vrši virmanski - bezgotovinski.