

Neutrik NL4MMX Image not found or type unknown

Neutrik NL4MMX

Šifra: 2320


Kategorija proizvoda: Konektori

Proizvođač: Neutrik

Cena: **900,00** rsd

Neutrik // NL4MMX -Speakon Cable To Cable Adapter 4-Pole

4 pole lockable coupler, links two NL2/4F*s together for cable extension. Can be permanently attached to NL2/4F*.

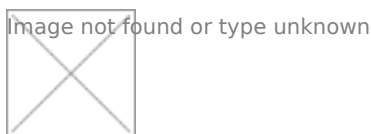

Product

Gender male

Electrical

Contact resistance $\leq 3 \text{ m}\Omega$ (after lifetime)

Dielectric strength 4 kVdc (peak)

Insulation resistance $> 1 \text{ G}\Omega$ (after dampheat)

Rated current per contact 15 A rms continuous

Rated current per contact 30 A audiosignal, duty cycle 50 %

Rated voltage 250 V (Insulation)

Attention speakON is NOT to be used as an AC mains connector!

Mechanical

Lifetime > 5000 mating cycles

Locking device Quick Lock

Material

Contact plating 4 μm Ag

Contacts Bronze (CuSn6)

Insert Polyamide (PA 6 30 % GR)

Shell Polyamide (PA 6 30 % GR)

Environmental

Flammability UL 94 HB

Solderability Complies with IEC 68-2-20

Temperature range $-30 \text{ }^\circ\text{C}$ to $+80 \text{ }^\circ\text{C}$

